Dritz®

1P
GROMMET PLIERS

Instruction Guide for Grommets

©2015 **Prym Consumer USA Inc.**
950 Brisack Rd. • Spartanburg, SC 29303
www.dritz.com

1P GROMMET PLIERS – Instructions

Fabric Preparation for Grommets

Use two layers of medium to heavy-weight fabric, reinforced with interfacing.
Mark position of grommets.
Test a grommet on swatch of fabric.

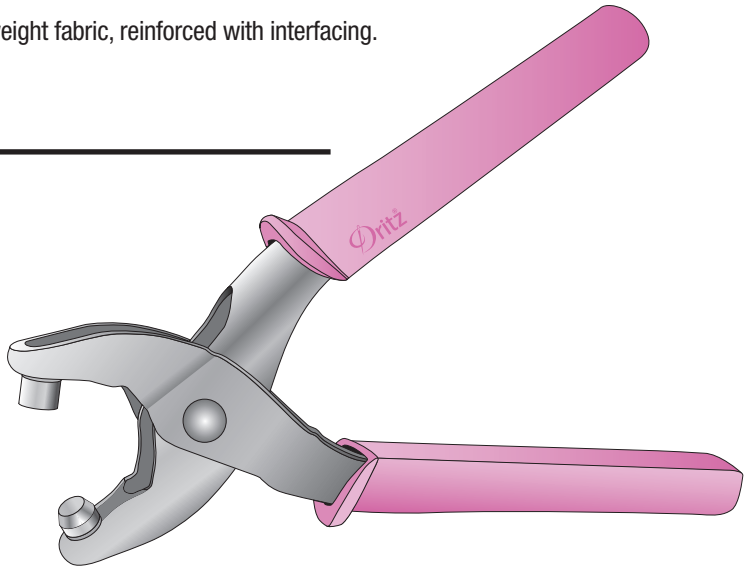

Instructions for Cutting Holes in Fabric

Pliers Tools:



Metal Round Die Base

Metal Cone Punch

Inserting Tools:

Insert round die base in one side of pliers and cone punch in other side.

Cutting Holes:

1. Position fabric in pliers and center tools over mark. Squeeze pliers firmly to cut hole.
2. After cutting several holes, it may be necessary to clear fabric cutouts from die base. Use a strong straight pin to remove fabric cutouts from die.
3. If pliers' tools will not cut through your specific type of fabric, trace inside of grommet and cut hole with scissors.

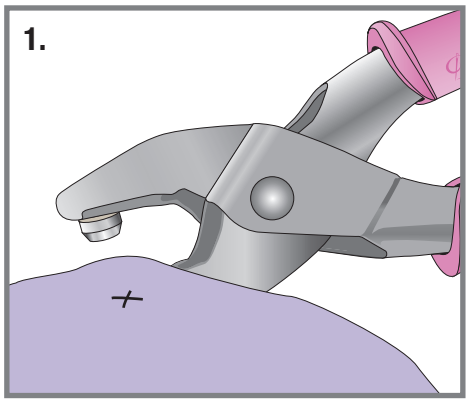

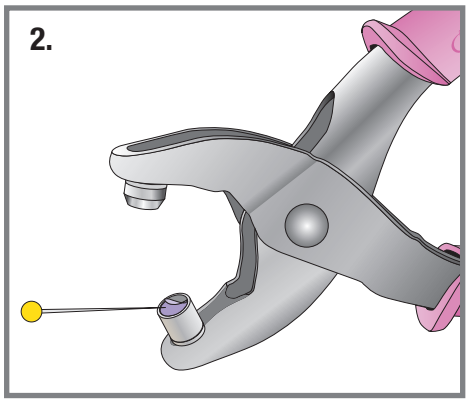

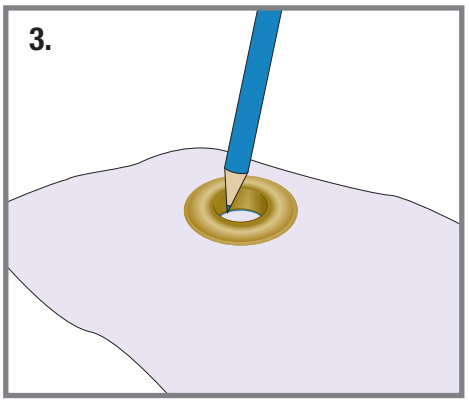

Removing Tools:

Slip hook of gray tool remover inside ledge of pliers and press down to release tool.

Repeat for opposite side.

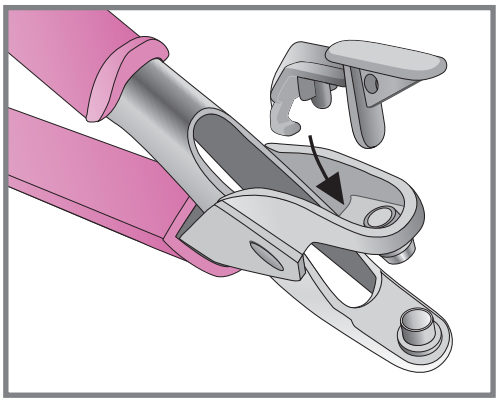

1P GROMMET PLIERS – Instructions (continued)

Instructions for Applying 3/8" Grommets

Grommet Parts:



Grommet Washer

Pliers Tools:

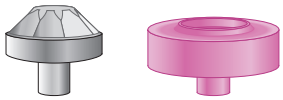

Metal Splitting Punch Pink Grommet Holder

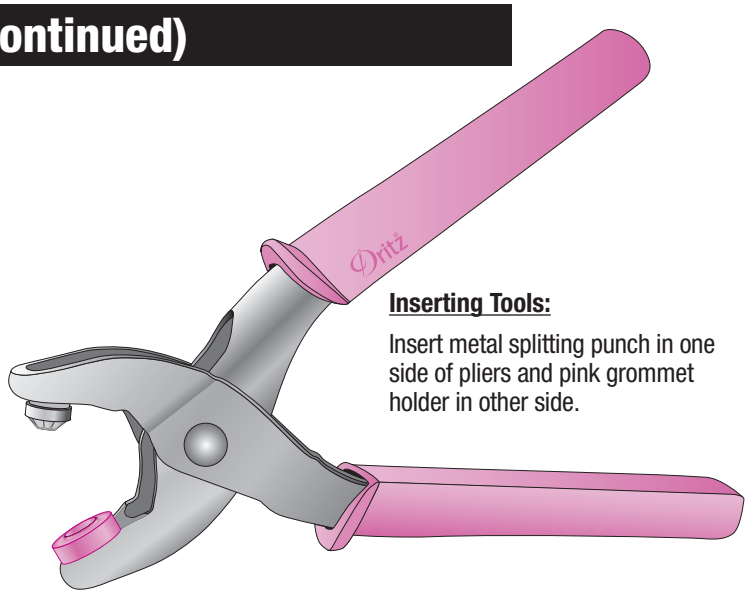

Inserting Tools:

Insert metal splitting punch in one side of pliers and pink grommet holder in other side.

Instructions:

1. Insert grommet post into hole with grommet front on right side of fabric.

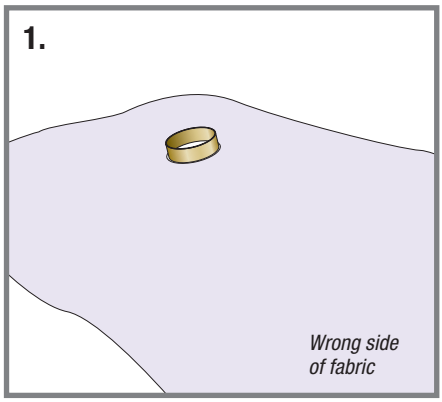

2. Place washer *(rounded side up)* over post of grommet.

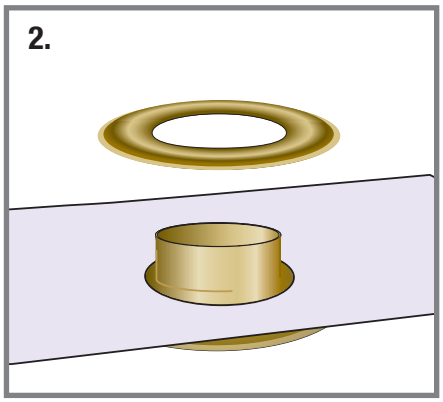

3. With grommet holder at bottom of pliers, place grommet, fabric and washer onto holder.

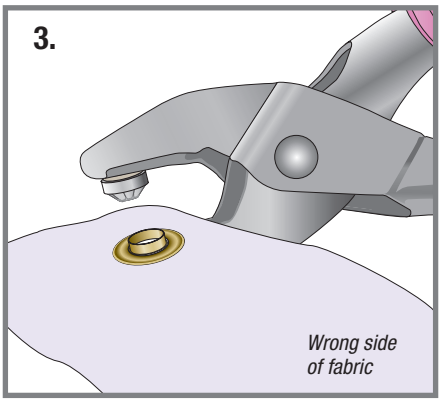

4. Squeeze pliers firmly to apply grommet. Check for tightness; squeeze again, if necessary. The grommet will split and roll back over the washer.

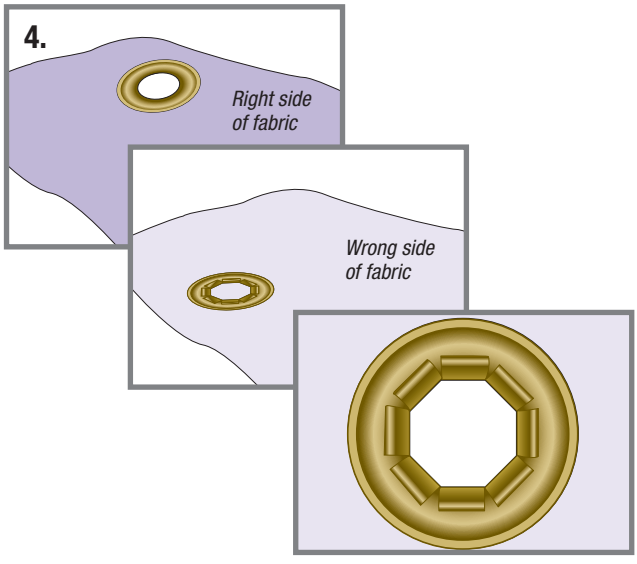

Removing Tools:

Slip hook of gray tool remover inside ledge of pliers and press down to release tool.

Repeat for opposite side.

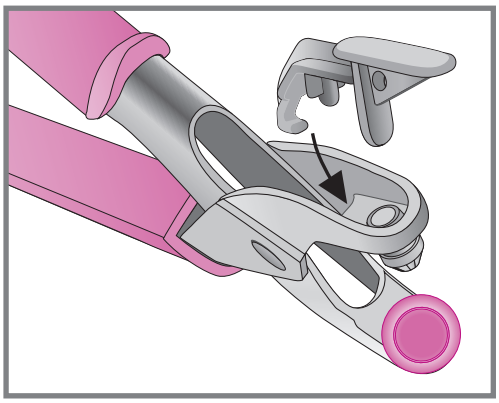

Additional Information

Storing Pliers Squeeze pliers together and hook gray tool remover at top of pliers.

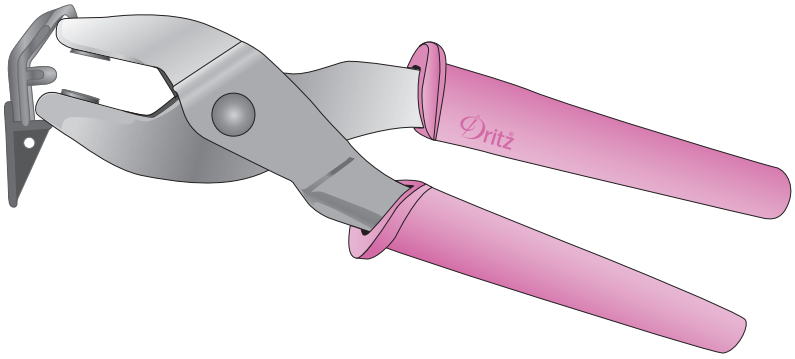

Replacement Inserts Replacement inserts have been provided. When tools are no longer staying in pliers well, remove worn insert and replace with new.



WARNING: Small parts. Keep away from children under 3 years old. NOT A TOY.